

SAFETY RAIL

- Quick Ship Program—ships in 2-working days.
- Protection for structural platforms, in-plant offices, conveyors, water mains, valuable equipment & personnel.
- Easy installation with all hardware included with columns.
- 10,000 lb. load at 5 mph rating.
- Bright OSHA yellow powder coat finish.
- Columns are 4" square high strength steel tube.
- Baseplate is 10" square x 5/8" thick steel, and can be offset if needed.
- Rails are 11 gauge high-tensile steel formed into a two rib corrugated design with two secondary ribs.
- 1/2" x 5" screw anchors and 1/2" connection hardware is provided.
- Custom lengths available in 1" increments.

MODEL # DESCRIPTION



C1	18" Column-Single Rail Application
C2	42" Column-Double Rail Application
C3	42" Column-Triple Rail Application
R10	Rail for 10' section
R9	Rail for 9' section
R8	Rail for 8' section
R7	Rail for 7' section
R6	Rail for 6' section
R5	Rail for 5' section
R4	Rail for 4' section
R3	Rail for 3' section
R2	Rail for 2' section



C2-42" Double Rail



C1-18" Single Rail

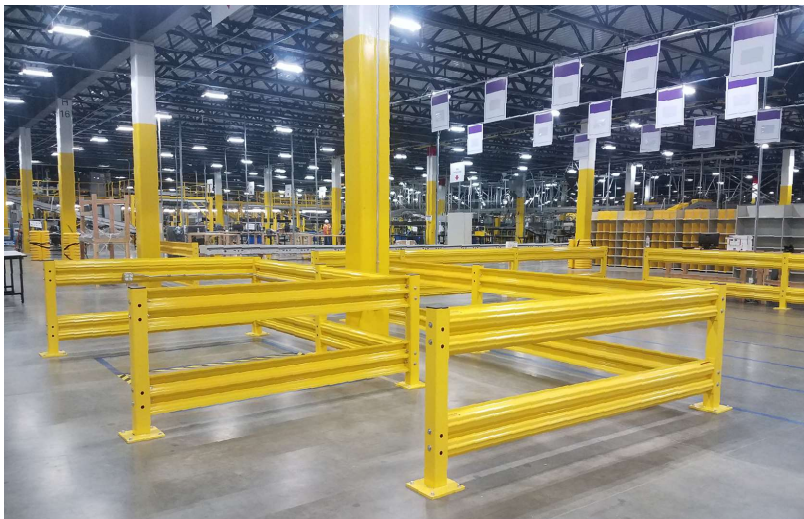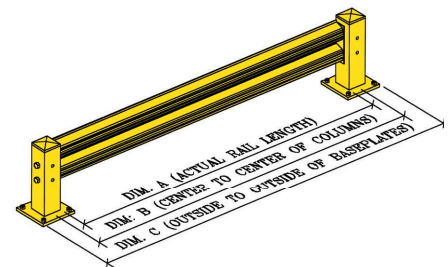

RAIL	DIM:A	DIM:B	DIM:C
R2	20"	24"	34"
R3	32"	36"	46"
R4	44"	48"	58"
R5	56"	60"	70"
R6	68"	72"	82"
R7	80"	84"	94"
R8	92"	96"	106"
R9	104"	108"	118"
R10	116"	120"	130"

* Special length rails available in one inch increments.